

Product

Remote Reset Decoder Software



Features:

- Reduces Engineer call out charges
- Simple operation
- Over 52 million reset codes
- ARC Decoder software unique codes
- Found in popular alarm panels
- Decoder software in popular ARC software
- PD6662 compliant

How it works:

The Technistore remote reset system works by a simple exchange of codes over the telephone which allows the Alarm Company or ARC to reset the system with a unique one off code. Our Remote reset keypad or the alarm panel generates and displays a five digit number after an alarm activation.

This number the "Quote Code" is quoted to the Alarm company or ARC by the customer over the telephone.

The Alarm Company or ARC then "Decode" this number by entering it into a computer running Technistore Decoder software. The resulting number is called the "Reset Code" this code when entered into the Remote Reset plus keypad resets the system.

Alarm Companies do reserve the right to refuse to provide a “Reset Code” if for instance the customer does not know the cause of the alarm activation. In most cases however the cause is known and a Remote “Reset Code” can be given.

Each time the system is activated a different “Quote Code” is generated and the “Reset Code” is therefore different every time. This ensures only the Alarm Company can authorise the resetting of the system in accordance with Police Force Policy and British Standards 4737 and PD6662.

Technistore Remote Reset algorithm is now built into the following alarm panels:

- Galaxy alarm panels
- DSC alarm panels
- Napco alarm panels
- Vista alarm panels
- Accord xpc alarm panel
- Visonic alarm panels
- Tyco alarm panels
- Gallagher alarm panels
- HKC alarm panels



Order Information:

Part no. R/R DECODER

Distributors:

Please contact us directly via our website to acquire a software license. Please click the link below to fill out a contact form.

www.technistore.co.uk/contact

Our Information:

Technistore LTD
Park Road West
Huddersfield
HD4 5RX
West Yorkshire

Tel: 01484 351880

www.technistore.co.uk



Product

ARN-1E Grade 3 Exit Terminator



Also includes: 3 fixing screws, 3 rawlplugs & tamperproof allen key.

Technical Specification Dimensions:

Height: 90mm

Depth: (maximum) 35mm

Width: 35mm

Weight: 170 grams

Push Button:

IP Rating IP66

Contact rating: 1Amp 12-24VDC

Piezo Buzzer: 7-16V DC current

30mA - 85db@10cm frequency 2300Hz

Features:

- Vandal resistant stainless steel
- Surface mounted housing
- Anti-tamper micro switch on lid
- 35mm wide to install on door frames
- Ensures entry/exit tone is audible to user
- Entry/exit buzzer built-in
- IP66 rated push button
- Tamper proof lid screws

Part Number: ARN-1E G3

Distributors:



ADI Security Ltd

www.adiglobaldistribution.co.uk



Enterprise Security

enterprisecuritydistribution.com



Norbain Ltd

www.norbain.com

Our Information:

Technistore LTD

Park Road West

Huddersfield

HD4 5RX

West Yorkshire


Tel: 01484 351880

www.technistore.co.uk



Product

ARN-1E Grade 2 Exit Terminator

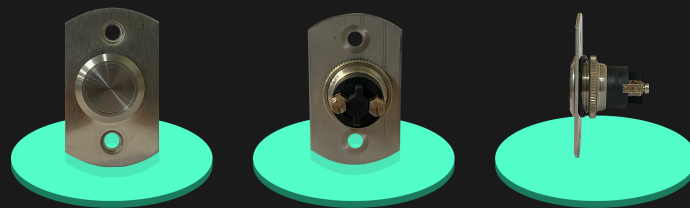

Also includes: 2 Snake eye fixing screws (Part No. ARN 2E).

Technical Specification Dimensions:

Height: 50mm

Depth: (maximum) 30mm

Width: 30mm

Weight: 32 grams

Push Button:

IP Rating IP66

Contact rating 1 Amp 12-24VDC

Features:

- Flush mounting plate
- IP66 rated push button
- Just 30mm wide to install on door frames
- Vandal resistant stainless steel construction
- Tamper proof snake eye screws
- Screw terminal connections
- Normally open operation

Part Number: ARN-1E G2

Distributors:



ADI Security Ltd

www.adiglobaldistribution.co.uk



Enterprise Security

enterprisecuritydistribution.com



Norbain Ltd

www.norbain.com

Our Information:

Technistore LTD

Park Road West

Huddersfield

HD4 5RX

West Yorkshire


Tel: 01484 351880

www.technistore.co.uk



Product

Universal Relay

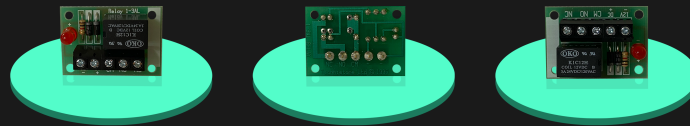

Included: 1 Universal Relay, 4 Plastic self adhesive feet.

Dimensions:

Height: 25mm

Depth: (maximum) 38mm

Width: 25mm

Weight: 15 grams

35mm by 45mm

Footprint (s/a feet fitted)

Volt free changeover contacts

Contacts rated at 3 Amp resistive

Relay Voltage 12V DC, Relay current 20 milli-amps

Features:

- Reverse polarity protection
- Comes with 4 self adhesive mounting feet
- 3 Amp switching capacity (resistive loads)
- Normally open & normally closed contacts
- Low current requirement only 20mA
- Visual LED indication of operation
- Compact footprint
- 12V DC operation

Distributors:



ADI Security Ltd

www.adiglobaldistribution.co.uk



Enterprise Security

enterprisecuritydistribution.com



Norbain Ltd

www.norbain.com

Part Number: 1-3AL

Our Information:

Technistore LTD

Park Road West

Huddersfield

HD4 5RX

West Yorkshire

Tel: 01484 351880

www.technistore.co.uk